

Displaying page layout variables

Kent McPherson a.o.*


2000/09/25

1 Introduction

This $\text{\LaTeX}2_{\epsilon}$ package is a reimplementation of `layout.sty` by Kent McPherson. It defines the command `\layout` which produces an overview of the layout of the current document. The command `\layout*` recomputes the values it uses to produce the overview.

The figure on the next page shows the output of the `\layout` command for this document.

*Converted for $\text{\LaTeX}2_{\epsilon}$ by Johannes Braams and modified by Hideo Umeki

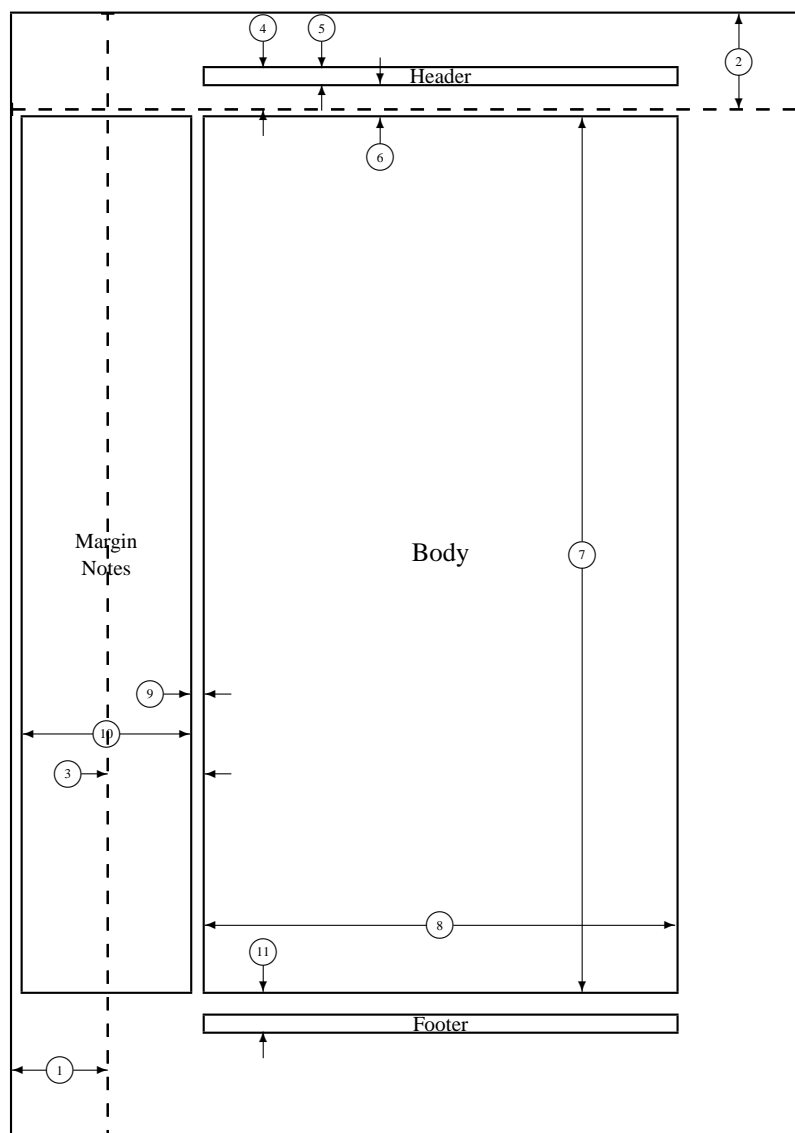

- | | | | |
|----|-----------------------|----|----------------------------------|
| 1 | one inch + \hoffset | 2 | one inch + \voffset |
| 3 | \oddsidemargin = 73pt | 4 | \topmargin = -31pt |
| 5 | \headheight = 12pt | 6 | \headsep = 25pt |
| 7 | \textheight = 658pt | 8 | \textwidth = 355pt |
| 9 | \marginparsep = 11pt | 10 | \marginparwidth = 126pt |
| 11 | \footskip = 30pt | | \marginparpush = 0pt (not shown) |
| | \hoffset = 0pt | | \voffset = 0pt |
| | \paperwidth = 597pt | | \paperheight = 845pt |